




DTL SERIES












Transmitted dome lights

Differently from DOM series, the light is transmitted uniformly through the dome, which is of translucent material, allowing more compact domes better covering the object. Specially designed for bright curved surfaces, eliminating brightness and shadows. Also, this system can get the lighting dome divided in three sectors controllable independently, increasing versatility. Ideal for inspection of welds.

► Technical specifications¹

Lighting model	DTL3521B
	
Dimensions	O225x85
Bottom O	55
RWD (mm)	<50
Weight	1440g
IP rating	IP40
Mounting holes	(x2)M8` 8 (x6)M4` 6
Connection	4P male chassis connector PIN 1 = +24V PIN 2 = 0V inner sector PIN 3 = 0V middle sector PIN 4 = 0V outer sector
Power cable (Not-included)	VCD Series
Modifiers ²	N/A
Accessories ³	
iBlueDrive tech.	N/A

► Instantaneous consumption⁴ (max.)

Lighting model		DTL3521B (inner)	DTL3521B (middle)	DTL3521B (outer)	*WT
TYPE C 24VDC		6.4W	13W	16W	-470C
		6.4W	13W	16W	-525C
		6.4W	13W	16W	-630C
		6.4W	13W	16W	-850C
		6.4W	13W	16W	-W00C
TYPE P		No 'Type P' standard LED lighting systems in this series			
TYPE S D _{max} = 1/20 Ton max= 2ms		1055mA/25W	2110mA/51W	2640mA/63W	-470S
		1055mA/25W	2110mA/51W	2640mA/63W	-525S
		1055mA/25W	2110mA/51W	2640mA/63W	-630S
		2510mA/60W	5015mA/120W	6270mA/150W	-850S
		1055mA/25W	2110mA/51W	2640mA/63W	-W00S
		1200mA/29W channel	2100mA/50W channel	3000mA/72W channel	-RGBS
TYPE i		No 'Type i' standard LED lighting systems in this series			

N/A= Not available CUS = Custom

(1) Environmental specifications and iconography legend in additional annex Z1.1 and Z2 respectively.


(2) Prior to manufacturing optional modifications in standard lighting systems. Please, consult the code before ordering (additional annex Z2.1).

(3) Accessories are not-included. More information in accessories section.

(4) Bear in mind that consumption table is only to be used as a guide. To refer to real values, please, consult product label when purchasing.




DTL SERIES

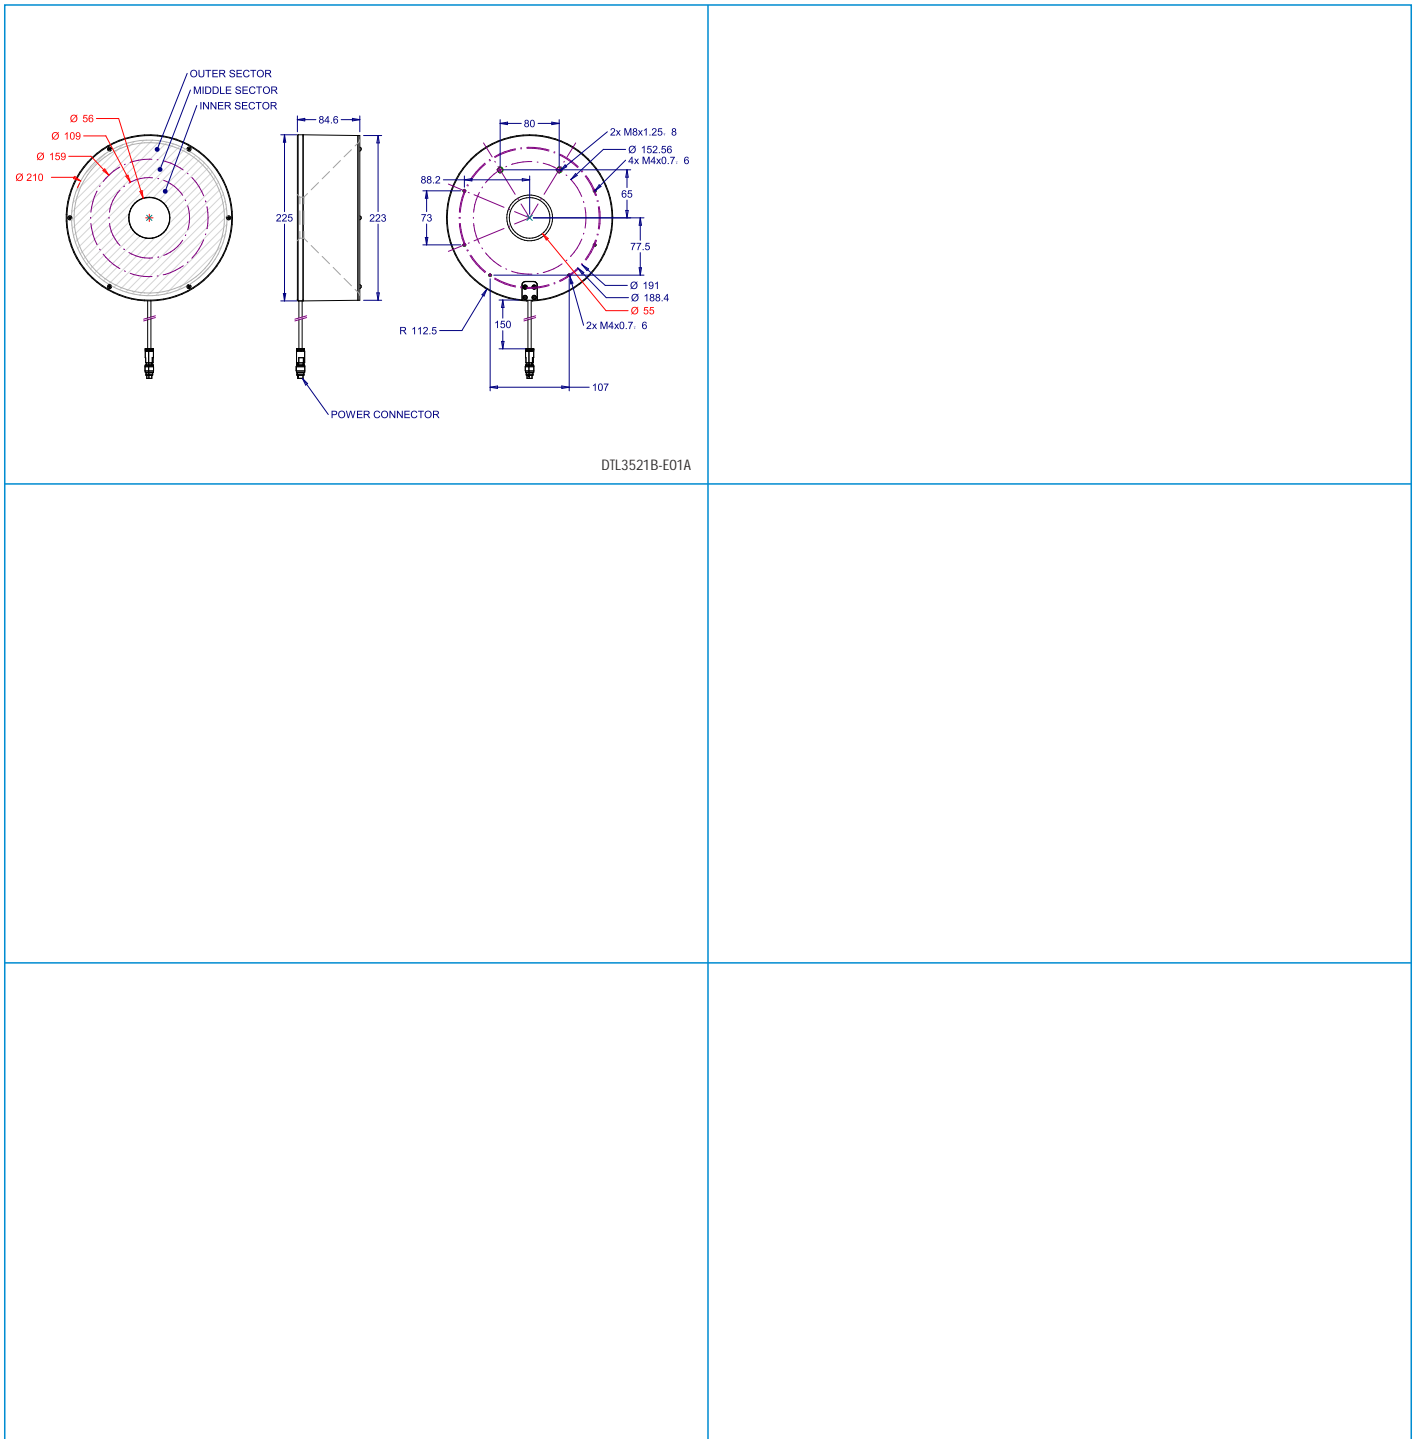



All units in millimeters, if not indicated.

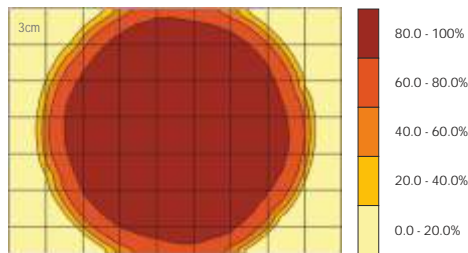

Example of DTL captured image




► Z1.1 - Environmental Specifications

Max. Operating Humidity	85% non-condensing
Operating Temperature	0 - 40°C
Storage Temperature	0 - 60°C
Housing material	Anodized aluminium
Standards	 


► Z1.2 - Control input NPN/PNP for 'Type C' lighting systems of DOL, PLC, PLX, PRH series, PRC0604C and PRC0606B.

■ NPN model (by default)

NPN chart of Vcontrol (Volts) vs Icontrol (mA)

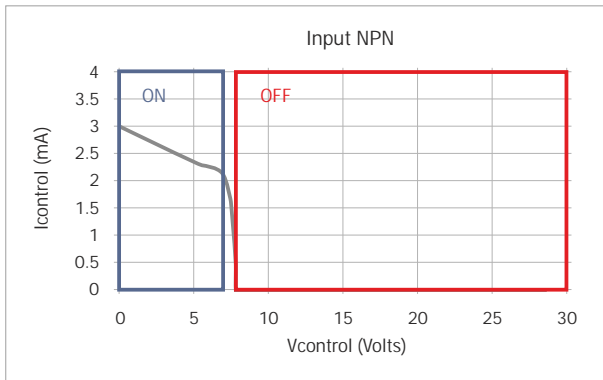

NPN wiring for ON/OFF mode

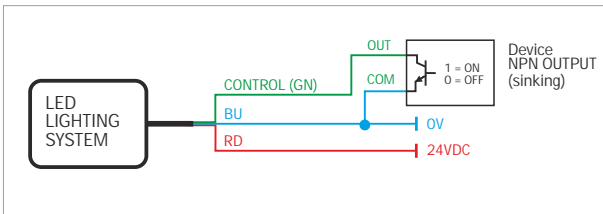


Electrical specifications


0V to +6.8V	Light ON
+7.2V to +24V	Light OFF
Working conditions	25°C, VIN = 24V
Connection	Direct to a NPN output
Delay from OFF to ON state	<5 μs
Delay from ON to OFF state	<5 μs
Bias voltage in control input	7.9V
Input impedance	7K9 ?

■ PNP model (lighting systems with PNP modifier =/P)

PNP chart of Vcontrol (Volts) vs Icontrol (mA)

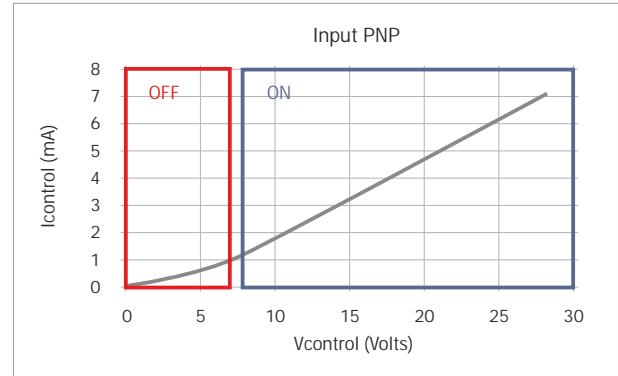

PNP wiring for ON/OFF mode

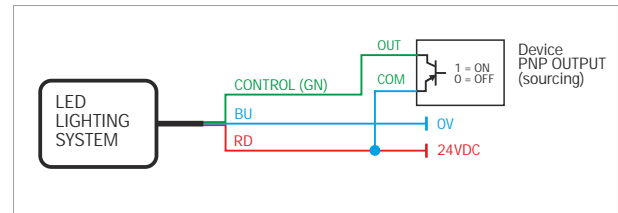

Electrical specifications


0V to +6.8V	Light OFF
+7.2V to +24V	Light ON
Working conditions	25°C, VIN = 24V
Connection	Direct to a PNP output
Delay from OFF to ON state	<5 μs
Delay from ON to OFF state	<5 μs
Bias voltage in control input	0V
Input impedance	4K ?
Compliance	IEC1131-2 Type 1, 2 and 3




► Z1.3 - iBlueDrive control input wiring

All iBlueDrive products come together with a quick-start guide for connection and working conditions. Refer to iBlueDrive Manual for extended information.


NPN wiring for strobe or ON/OFF mode

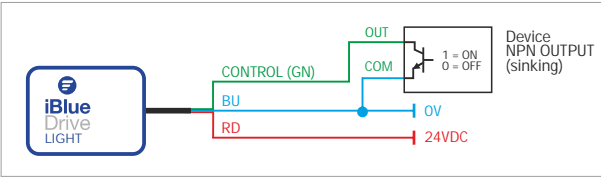


PNP wiring for strobe or ON/OFF mode

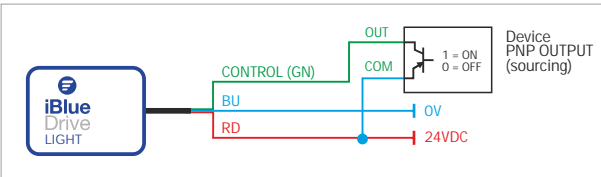


TTL wiring for strobe or ON/OFF mode

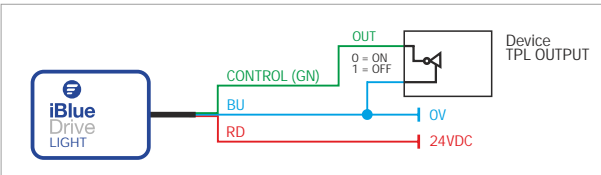

Wiring for continuous mode

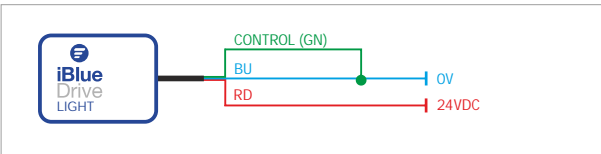


Wiring for continuous dimming mode

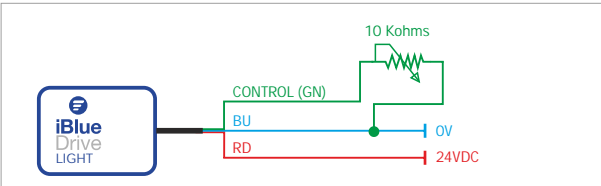

► Z1.4 - iBlueDrive inline

iBlueDrive inline is the driver for iBlueDrive technology integrated as a box of 65x33mm to the cable that goes from the lighting system to the connector. It is used when iBlueDrive driver can not be integrated on chassis. See diagram:

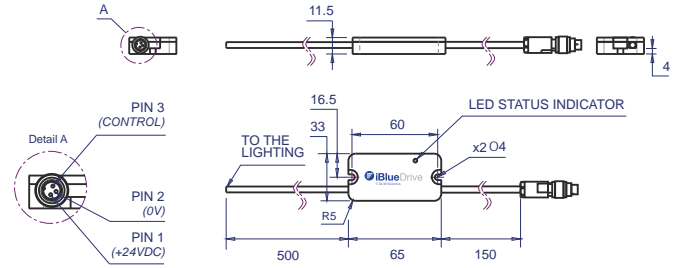

WARNING! In continuous and powered mode, clamp driver to a metal surface for heat dissipation. In Strobe mode is not required, but recommended.



► Z2.1 - Modifiers legend

icon	Description	Code
	Narrow angle of emission	/AN
	Medium angle of emission (By default)	/AM
	Wide angle of emission	/AW
	Oval angle of emission = 23-24° (x) 17-18° (y)	/AO
	Diffuse emission	/AD
	Polarizer filter	/FPL
	Diffuser filter	/FDR
	Dome hole of 46mm	/CC1
	Dome hole of 40mm	/CC2
	IP Rating = IP67	/67
	PNP input model	/P
	50mm focal Length	/F1
	150mm focal Length	/F2
	Infinite focal Length	/F3

► Z2.2 - Accessories legend

icon	Description	Serie
	Power cable/s	VCB, VCC, VCD Series
	Other cable/s	VCU, VCL
	Strobe and RGB controller/s	VST, VSC Series
	Polarizer filter	VPF, VPC
	Diffuser filter	VDF
	Collimater filter on x axis	VCFx
	Collimater filter on y axis	VCFy
	Collimater filter on xy axis	VCFxy
	Darkfield converter	VRF
	Protector filter	VPT
	Heat dissipator	VHD
	Fixing bracket	VBA, VBB, VBC Series

► Z2.3 - iBlueDrive Accessories legend


icon	Description	Serie/Product
	Accessorie to configure iBlueDrive devices: iBlueDrive Box, iBlueDrive USB	VTA0005A, VTA0007A
	iBlueDrive optocoupler	VTA0020A
	iBlueDrive potentiometer	VTA0030B

► Z2.4 - Technical drawings legend

icon	Description
	Optical axis
	Viewing window dimensions
	Lighting elements
	Light emission center
	Lighting surface dimensions

► Z2.5 - Colours & Wavelegths legend

icon	Wavelength	Colour	Code
	365nm	UV-	-365
	400nm	UV	-400
	470nm	BLUE	-470
	525nm	GREEN	-525
	630nm	RED	-630
	850nm/880nm	IR	-850/-880
		WHITE	-W00
		RGB	-RGB



► Z2.6 - Types of lighting legend

icon	Description
	Radial lighting
	'Darkfield' lighting effect. Low angle illumination
	Backlight illumination
	'Cloudy day' lighting effect
	'Bright field' lighting effect
	Projector lighting
	Axial lighting

► Z2.7 - Types of light legend

icon	Description
	Direct light
	Diffuse light
	Ultra-diffuse light