

# MV-CA020-10GM/GC

2 MP 1/1.7" CMOS GigE Area Scan Camera



**GEN*i*CAM**

**GIG*E***  
VISION

## Introduction

MV-CA020-10GM/GC camera adopts Sony® IMX430 sensor to provide high-quality image. It uses GigE interface to transmit non-compressed images in real time with max. frame rate reaching 60 fps in full resolution.

## Key Feature

- Adopts GigE interface and max. transmission distance of 100 meters without relay.
- Supports auto and manual adjustment for exposure control, LUT, Gamma correction, etc.
- Up to 128 MB local memory for burst transmission and retransmission.
- Supports hardware trigger, software trigger, etc.
- Compatible with GigE Vision Protocol V2.0, GenICam Standard, and third-party software based on these protocol and standard.


## Available Model

- Mono camera: MV-CA020-10GM
- Color camera: MV-CA020-10GC


## Applicable Industry

Electronic semiconductor, factory automation, logistics code reading, medical packing, quality inspection, etc.

## Sensor Quantum Efficiency

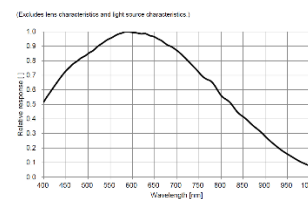


MV-CA020-10GM

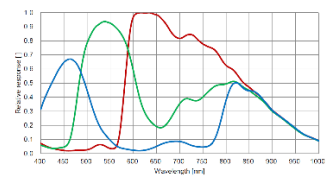

MV-CA020-10GC

## Dimension

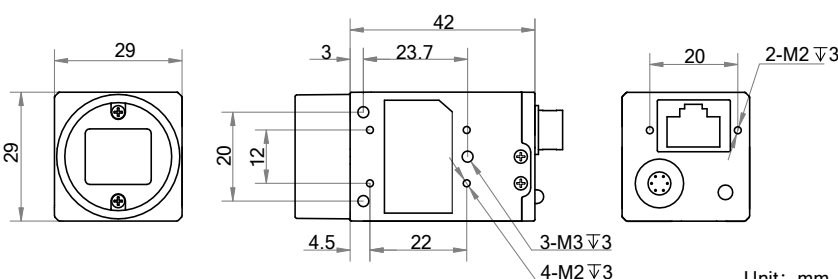

Unit: mm

## Specification

| Model                     | MV-CA020-10GM   | MV-CA020-10GC  |
|---------------------------|---|--|
| <b>Camera</b>             |   |  |
| Sensor type               | CMOS, global shutter  |  |
| Sensor model              | Sony® IMX430  |  |
| Pixel size                | 4.5 μm × 4.5 μm   |  |
| Sensor size               | 1/1.7"  |  |
| Resolution                | 1624 × 1240   |  |
| Max. frame rate           | 60 fps @ 1624 × 1240  |  |
| Dynamic range             | 72.08 dB  |  |
| SNR                       | 43.8 dB   |  |
| Gain                      | 0 dB to 24 dB   |  |
| Exposure time             | 1 μs to 10 sec  |  |
| Exposure mode             | Off/Once/Continuous exposure mode   |  |
| Mono/color                | Mono  | Color  |
| Pixel format              | Mono 8/10/10p/12/12p  | Mono 8/10/12, RGB 8, BGR 8,<br>Bayer GB 8/10/10p/12/12p,<br>YUV422Packed, YUV422_YUYV_Packed |
| Binning                   | Supports 1 × 1, 2 × 2   |  |
| Decimation                | Supports 1 × 1, 2 × 2   |  |
| Reverse image             | Supports horizontal and vertical reverse image output   |  |
| Image buffer              | 128 MB  |  |
| <b>Electrical feature</b> |   |  |
| Data interface            | Gigabit Ethernet, compatible with Fast Ethernet   |  |
| Digital I/O               | 6-pin Hirose connector provides power and I/O, including opto-isolated input × 1 (Line 0), opto-isolated output × 1 (Line 1), bi-directional non-isolated I/O × 1 (Line 2). |  |
| Power supply              | 9 VDC to 24 VDC, supports PoE   |  |
| Power consumption         | Typ. 3.27 W @ 12 VDC  | Typ. 3.6 W @ 12 VDC  |
| <b>Mechanical</b>         |   |  |
| Lens mount                | C-mount   |  |
| Dimension                 | 29 mm × 29 mm × 42 mm (1.1" × 1.1" × 1.7")  |  |
| Weight                    | Approx. 68 g (0.15 lb.)   |  |
| Ingress protection        | IP30 (under proper lens installation and wiring)  |  |
| Temperature               | Working temperature: 0 °C to 50 °C (32 °F to 122 °F)<br>Storage temperature: -30 °C to 70 °C (-22 °F to 158 °F)   |  |
| Humidity                  | 20% RH to 80% RH (no condensation)  |  |
| <b>General</b>            |   |  |
| Client software           | MVS or third-party software meeting with GigE Vision Protocol   |  |
| Operating system          | 32/64-bit Windows 7/10, 32/64-bit Linux   |  |
| Compatibility             | GigE Vision V2.0, GenICam   |  |
| Certification             | CE, FCC, RoHS, KC   |  |