

**MV-ACC-01-2102-x
POWER-I/O SUPERFLEXIBLE CABLE HRS 6P/OPEN**




Cable Description:

Accessory	Description	Length	Applicable Camera
POWER-I/O Superflexible CABLE HRS 6P/OPEN	Power-I/O superflexible cable with HRS 6pin connector and open end	3/5/10/15/30 m	Hikrobot USB 3.0 Cameras Hikrobot GigE Cameras

Order Models:

- 3m 6pin Power-I/O Superflexible cable: MV-ACC-01-2102-3m
- 5m 6pin Power-I/O Superflexible cable: MV-ACC-01-2102-5m
- 10m 6pin Power-I/O Superflexible cable: MV-ACC-01-2102-10m
- 15m 6pin Power-I/O Superflexible cable: MV-ACC-01-2102-15m
- 30m 6pin Power-I/O Superflexible cable: MV-ACC-01-2102-30m

Cable Overview:

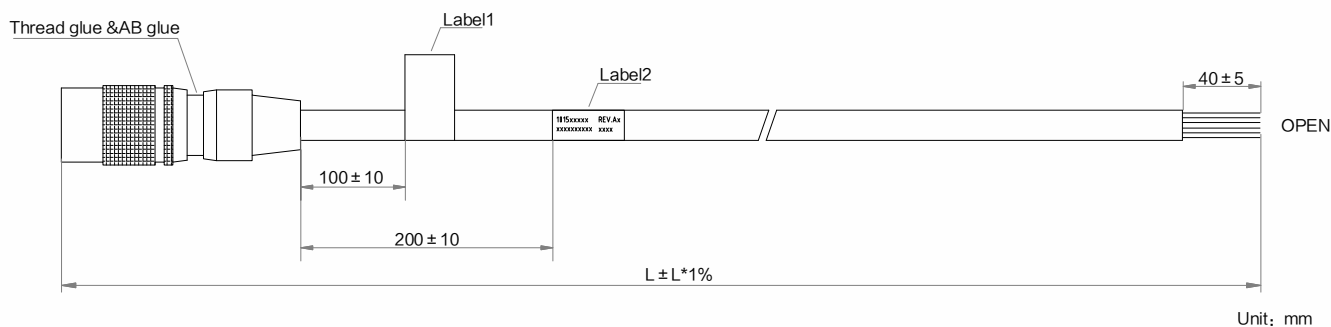

Cable Parameters:

Pin Definition

Pin	Wire Color
1	Orange
2	Yellow
3	Purple
4	Blue
5	Green
6	Gray

Table 1: Pin Definition



Physical Specifications

Camera-side Connector	Hirose 6 pin
Host-side Connector	None, open end
Cable Cross-section	26 AWG
Cable Diameter	4.6 mm
Cable Insulation Material	PVC
Outer Jacket	PVC
Cable Color	Black
Minimum Bending Radius	46 mm
Maximum Bending Cycles	5 million times

Table 2: Physical Specifications

Electrical Specifications

Maximum Operating Voltage	300 V
Cable Resistance	≤150 Ω/km

Table 3: Electrical Specifications

Environmental Specifications

Operating Temperature Range	-10 °C-80 °C
-----------------------------	--------------

Table 4: Environment Specifications

Plug Specifications

Durability	>1000 mating cycles
Contact Resistance	10 mΩ
Contact Plating	Silver
Plug Insulation Material	POLYAMIDE

Table 5: Plug Specifications

Compliance

RoHS Compliance	✓
UL Compliance	

Table 6: Compliance

Read the user manual for the camera including the precautions before connecting the cable to the camera. The user manual also contains further information about pin assignments, power requirements, as well as comprehensive information about installing and using the camera.

HIKROBOT

Hangzhou Hikrobot Technology Co., Ltd.

No.399 Danfeng Road, Binjiang District, Hangzhou 310051, China.

en.hikrobotics.com

Copyright Hikrobot

Hangzhou Hikrobot Technology Co., Ltd. All Rights Reserved. Hangzhou Hikrobot Technology does not tolerate any infringement. Any organization or individual may not imitate or reproduce in whole or in part of the content. The data herein is based on Hikrobot's internal evaluation. Actual data may vary depending on specific configuration and operating condition. The information herein is subject to change without notice. All the content has been checked conscientiously. Nevertheless, Hikrobot shall not be liable to damages resulting from errors, inconsistencies or omissions.